

Frequency Monitoring Codes

Listening Squawks

Listen out on the appropriate frequency and set your transponder to the corresponding listening squawk.

A squawk does not imply that you are receiving an air traffic service, nor that you are cleared to enter controlled airspace.


When you leave the area or change frequency, select the SSR transponder code appropriate to your flight rules, 7000 for VFR or 2000 for IFR (squawk conspicuous).

Pilots must refer to AIP supplements and check NOTAMs before each flight.



Frequency Monitoring Codes

Listening Squawks

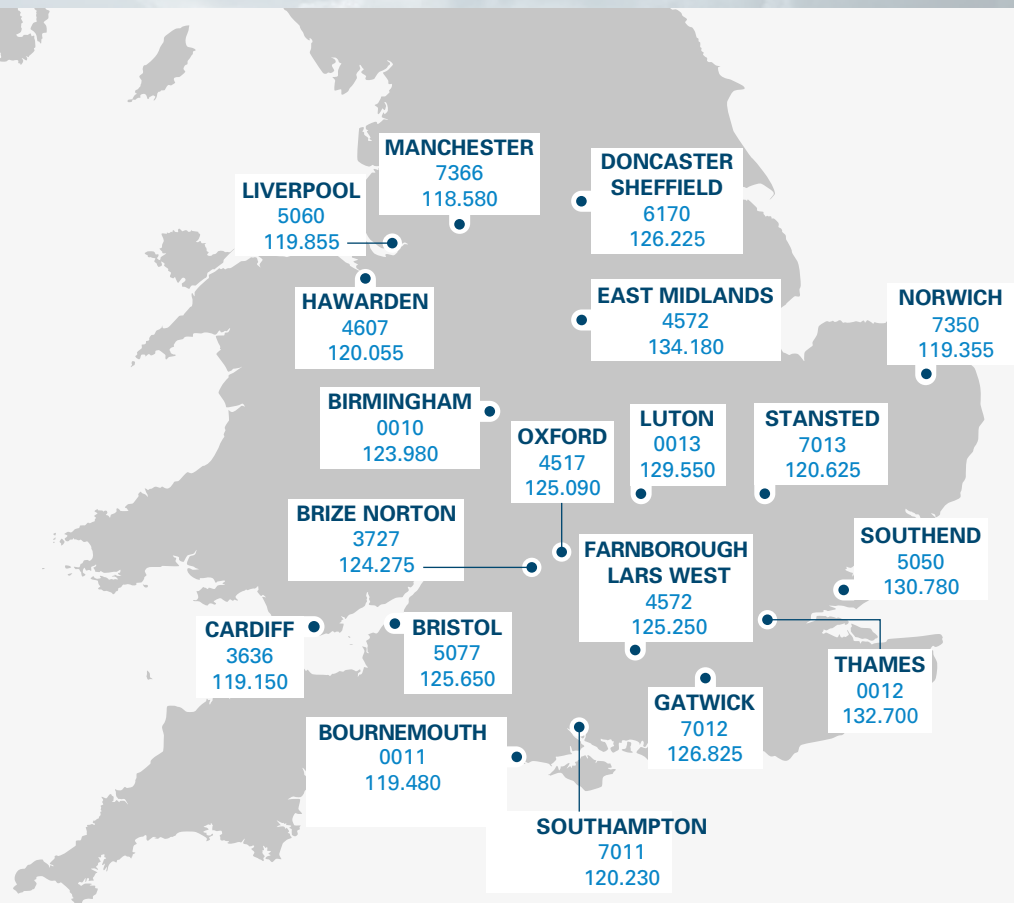

Listen out on the appropriate frequency and set your transponder to the corresponding listening squawk.

A squawk does not imply that you are receiving an air traffic service, nor that you are cleared to enter controlled airspace.

When you leave the area or change frequency, select the SSR transponder code appropriate to your flight rules, 7000 for VFR or 2000 for IFR (squawk conspicuity).

Pilots must refer to AIP supplements and check NOTAMs before each flight.